



New Tiles
Series
2019-20

STILEX

VINYL FLOORING



1.5mm Marble Tiles

18"x18"x1.5mm

Packing: 30 pcs/67.50 sqft per box



6411



5081



5581



8010



6011



3130



7080



3120

Note: This card depicts our standard shades which may vary slightly

STILEX

TILES RANGE

STILEX

TILES RANGE



2mm Concrete Tiles & Linear Elegance Tiles

24"x24"x2mm

Packing: 15 pcs / 60 sqft per box




C-1



C-3



C-2

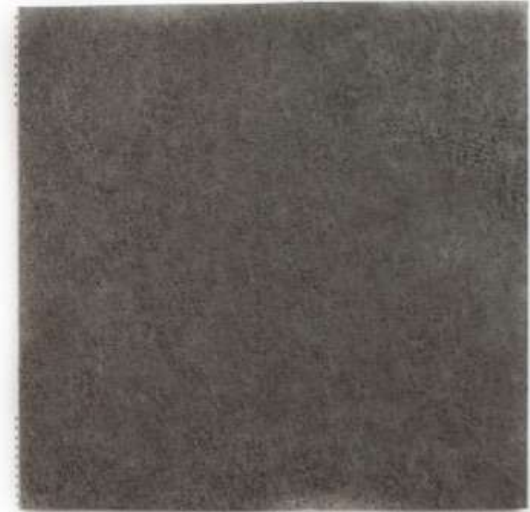

C-4



L-1



L-2

Note: This card depicts our standard shades which may vary slightly



2mm Metal & Sparkle Tile

18"x18"x2mm

Packing: 25 pcs/56.25 sqft per box



SPK WHITE



SPK BLACK



SPK BLUE



SPK RED



M-217



M - 222



M-221



M - 220



2mm Carpets

18"x18"x2mm

Packing: 25 pcs/56.25 sqft per box



8100



8155



8883



9506



8630



2515



8606



2514

Note: This card depicts our standard shades which may vary slightly.

















STILEX

TILES RANGE

DESCRIPTION

STILEX vinyl floorings are available in a variety of design, thickness and textures for different applications for both residential and commercial use. These flooring tiles, Strips and planks are non-asbestos flexible vinyl floorings brought to you with a combination of elegance, warmth, charm and richness of natural products like wood and marble. The wood planks and carpet tiles are available with an exceptional heavy duty wear layer of 0.3mm which gives the product an excellent abrasion resistance. Stilex tiles and planks also have a matt finish UV coating to protect colour fading and also provide a dust repellent surface for easy maintenance.

TECHNICAL DATA

CHARACTERISTICS	TEST METHOD	RESULT
 Dimension	EN 427	2.0mm Plank 6" x36" (15.24x91.44cm) 3.0mm Plank 6" x36" (120.32x91.44cm)
 Thickness-Overall		2.0 / 3.0 mm
 Total weight	EN 430	14 / 19 Kgs/Box
 Peeling strength of layers	EN 431	Pass
 Shear forces of layers	EN 432	Good
 Residual indentation after static load	EN 433	≤ 0.10mm
 Dimension stability	EN 434	Shrinkage ≤ 0.25% Curling ≤ 2mm
 Flexibility-10 mm mandrel	EN 435	No Damage
 Wear resistance	EN 660 ASTM F 510	≤ 2.0mm ³ < 2.0mm ³
 Toxic	EN 71 part 3	Complies
 Color fastness to light	EN 20 105-802	≥ 6
 Resistance to fire	ASTM E84 · 03	NFPA Class B
 Slip resistance	DIN 51130	R9
 Bearing a castor chair	EN 425	Suitable
 Resistance to chemicals	EN 660 ASTM F 510	Class 0
 Performance classification	EN 685	22, 34, 43

Imported by:

Raj Agencies

Mumbai-21

E-mail: stilexfloors@gmail.com

<http://www.stilex.in>